


SPA LID LIFTER INSTALLATION

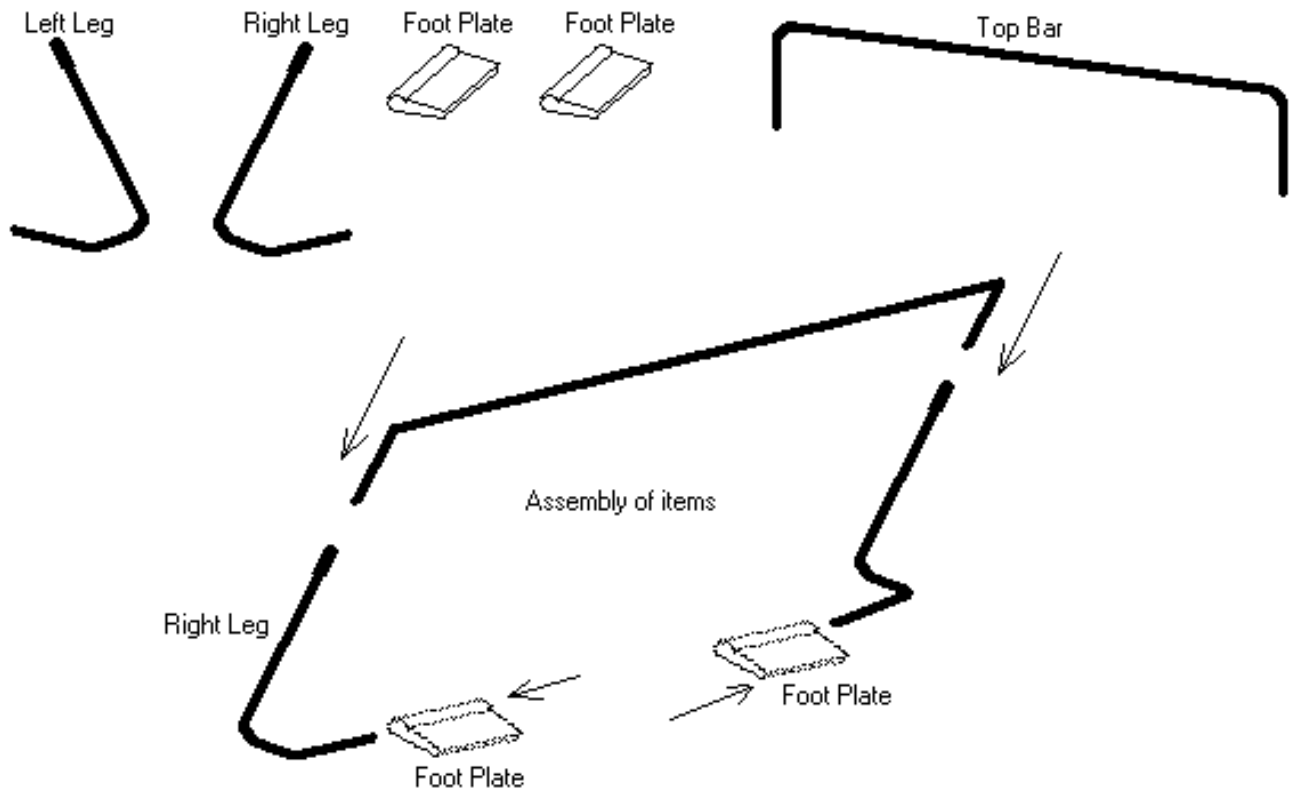

1. Install lifter before filling spa with water.

2. Temporarily insert a small block of wood under the centre of the spa footing. Remove block of wood when Foot Plates are in place

3. The Foot Plates are held in place by the weight of the spa.

4. Apply a small amount of insulation tape or duct tape to each end of the top bar, before fitting into the legs. This is to secure the mating surfaces.

